

ROMA81 [S3 SRC]

UNISEX: 74785 BLACK

SIZE: EU 35-48, UK 2.5-13



EN ISO 20345:2011 [S3 SRC]



Padded collar

Regular fit



Coated leather upper



WATERPROOF - designed to repel water and keep your feet dry



STEEL SAFETY TOE - 200 joules

DATA GUIDE	
Certification:	EN ISO 20345:2011 [S3 SRC]
Upper Material:	Coated leather
Lining Material:	Nylon mesh
Midsole Material:	PU
Outsole Material:	Rubber
Safety Toe Cap:	Steel



Click or scan QR code to view certificate



Resistant to fuel oil

Antistatic property



PUNCTURE RESISTANT MIDSOLE

Energy absorbing heel construction



EXTREMELY SLIP-RESISTANT OUTSOLE

- Exceeds the industry norm SR according to EN ISO 20344:2021 slip resistance test



TRIPGUARD

- Allows ease of movement between different surfaces
- Added depth for improved durability and wear time
- Larger surface covered by the outsole provides better slip-resistance




CLOG-RESISTANT traction lugs are widely spaced to prevent dirt and debris getting stuck in the outsole

Weight (per shoe):
718 grams
(based on size 41)

TESTING THE SLIP RESISTANCE OF OUR SFC OUTSOLE [EN ISO 20344:2021]

STANDARD REQUIREMENT

SR REQUIREMENT

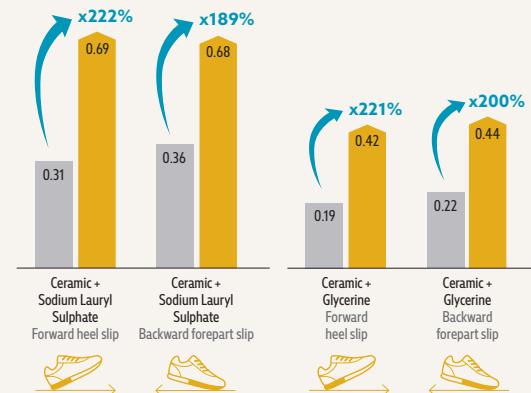

Slip resistance test according to EN ISO 20344:2021, conducted by Intertek Testing Services Shenzhen Ltd., in August 2022; on a scale of 0.0 (without slip resistance) to 1.0 (very high level of slip resistance, e.g. on dry carpeted floors). All SFC shoes are fitted with the patented, slip-resistant Shoes For Crews outsole. Tested product: Carrig Low 62201.

SHOES
FOR CREWS®