

DOLCE81 [S3 SRC]

UNISEX: 76236 BLACK

SIZE: EU 35-48, UK 2.5-13

S3 CE UK EN ISO 20345:2011 [S3 SRC]

Padded collar



Regular fit



Coated leather upper



WATER RESISTANT upper to temporarily repel water and keep your feet dry



STEEL SAFETY TOE - 200 joules

DATA GUIDE

Certification: EN ISO 20345:2011 [S3 SRC]

Upper Material: Coated leather

Lining Material: Nylon mesh

Midsole Material: PU

Outsole Material: Rubber

Safety Toe Cap: Steel



Click or scan QR code to view certificate



EXTREMELY SLIP-RESISTANT OUTSOLE

- Exceeds the industry norm SR according to EN ISO 20344:2021 slip resistance test



TRIPGUARD

- Allows ease of movement between different surfaces
- Added depth for improved durability and wear time
- Larger surface covered by the outsole provides better slip-resistance




CLOG-RESISTANT traction lugs are widely spaced to prevent dirt and debris getting stuck in the outsole

TESTING THE SLIP RESISTANCE OF OUR SFC OUTSOLE [EN ISO 20344:2021]

STANDARD REQUIREMENT

SR REQUIREMENT

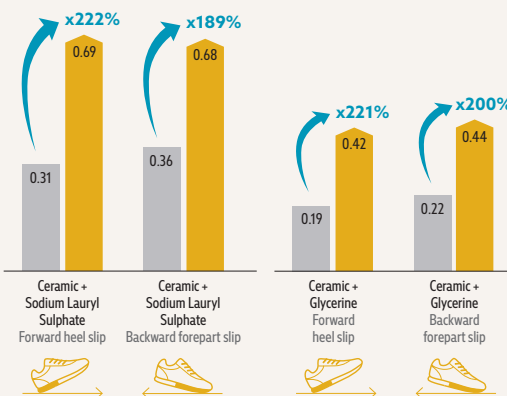

Slip resistance test according to EN ISO 20344:2021, conducted by Intertek Testing Services Shenzhen Ltd., in August 2022; on a scale of 0.0 (without slip resistance) to 1.0 (very high level of slip resistance, e.g. on dry carpeted floors). All SFC shoes are fitted with the patented, slip-resistant Shoes For Crews outsole. Tested product: Carrig Low 62201.

Resistant to fuel oil



PUNCTURE RESISTANT MIDSOLE

Antistatic property



Energy absorbing heel construction



Weight (per shoe):
691 grams
(based on size 41)

SHOES
FOR CREWS